

FLAIL MOWER TRITURADOR

Coffee, vineyards, orchards, roads and recreation areas

Café, frutas en general, mantenimiento de carreteras y autopistas, pastos y paisajismo.



TPL-160

Main features

- **Mechanical or hydraulic lateral and center displacement**
- **Shredding of twigs of up to 6 cm thick**
- **Low maintenance costs**
- **Frame with rear opening cover**
- **Tiller lifter device included**



Principales características

- *Desplazamiento central o lateral mecánico o hidráulico*
- *Tritura ramas de hasta 6 cm de diámetro*
- *No necesita de super reducción.*
- *Bajo costo de mantenimiento*
- *Armazón con apertura de la tapa trasera*
- *Levantador de la falda del café*

Technical data

Informaciones Técnicas

TPL-140 | TPL-160 | TPL-180 | TPL-200 | TPL-220
TPPC-090 | TPP-160

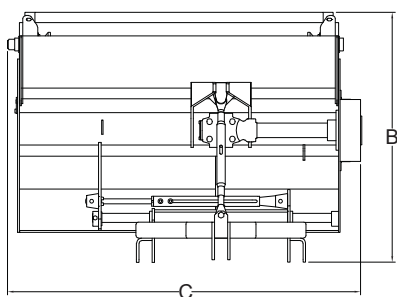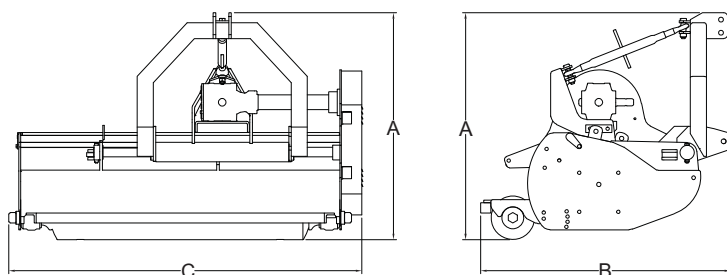

Hydraulic offset
Desplazamiento hidráulico

MODEL MODELO	DIMENSIONS <i>DIMENSIONES</i>		
	m		
	A	B	C
TPPC-090	0,90	0,95	1,00
TPP-160	1,00	1,40	1,80
TPL-140	1,15	1,25	1,55
TPL-160	1,15	1,25	1,75
TPL-180	1,15	1,25	1,95
TPL-200	1,15	1,25	2,15
TPL-220	1,15	1,25	2,35



Roller with flails
Rotor de martillos

MODEL MODELO	WORKING WIDTH ANCHO DE TRABAJO	POWER TAKE-OFF TIPO DE TRANSMISIÓN	NUMBER OF FLAILS NÚMERO DE MARTILLOS	POWER REQUIREMENT / TRACTOR POWER POTENCIA TOMA DE FUERZA DEL TRACTOR	NET WEIGHT PESO NETO
	m			CV	kg
TPPC-090	0,90	540	9	25 / 50	280
TPP-160	1,60	540	10	60 / 100	700
TPL-140	1,40	540	14	30 / 75	520
TPL-160	1,60	540	16	45 / 85	620
TPL-180	1,80	540	18	55 / 90	700
TPL-200	2,00	540	20	75 / 90	760
TPL-220	2,20	540	22	75 / 90	880

We reserve the right to change the technical features without previous notice. Reservamos el derecho de alterar las características técnicas sin aviso previo.



Rua Honório Soares, 80
Espírito Santo do Pinhal - SP - Brasil
CEP 13.990-000
Fone: +55 19 3651-3233
www.pinhalense.com.br